


PCWI SURFACE PROFILE NEEDLE GAUGES

Application

- Measurement of Surface Profile and Pitting.
- Requires a small flat area for measurement.
- The special foot and needle ensures it meets the requirements of AS3894 Series.

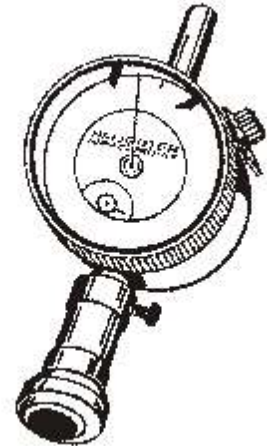

Specifications

Range:

Analogue: 0 to 1000µm

Digital: 0 to 5000µm

Accuracy: ±2µm

Dial face diameter:

Analogue: 50mm

Digital: 42mm

PCWI DIAL THICKNESS GAUGES

TESTEX SURFACE PROFILE TAPE

Application

- Permanent record of peak-to-valley height of profile after sand, grit or shot blasting.

Specifications

Analogue dial gauge:

Range: 0 to 1mm

Accuracy: ±1µm

Resolution: 0.001

Dial face diameter: 55mm

Digital dial gauge:

Range: 0 to 10mm

Accuracy: ±1µm

Resolution: 0.001


Dial face diameter: 55mm

Tests per tape roll: 50

Range

Coarse Tape: 20 to 50µm

XCoarse Tape: 40 to 115µm



Certification of
Dial Gauges available